



code

DESIGN MEETS TECHNOLOGY



PROLIGHT
designed to create

SHAPE





CODE is the perfect synthesis of PROLICHT cooperation with Tom Dixon: a product that merges technological expertise with a unique design vision, an innovation that could only be created together. The elementary shapes of round, square and line form the basis of a kit of parts which allows infinite possibilities to design graphic lighting sculptures.

code



Tom Dixon: design in constant motion

A restless innovator who emerged in the mid-1980s as an unconventional, self-taught designer. Today, internationally recognised as one of the most original voices in British design.

code



Each board is deliberately left bare, with no diffusers, lenses or secondary optics. The amplified circuit reveals the raw flow of power from the track to the components to the LED. Pure function is transformed into a graphic expression.

code




The CODE shapes the atmosphere as easily as it creates sculptures. It can shift from warm to cool, or simply serve as a decorative feature. At full power, it emits raw, unfiltered light. Dimmed, its panels transform into graphic patterns that appear to float.

code



code

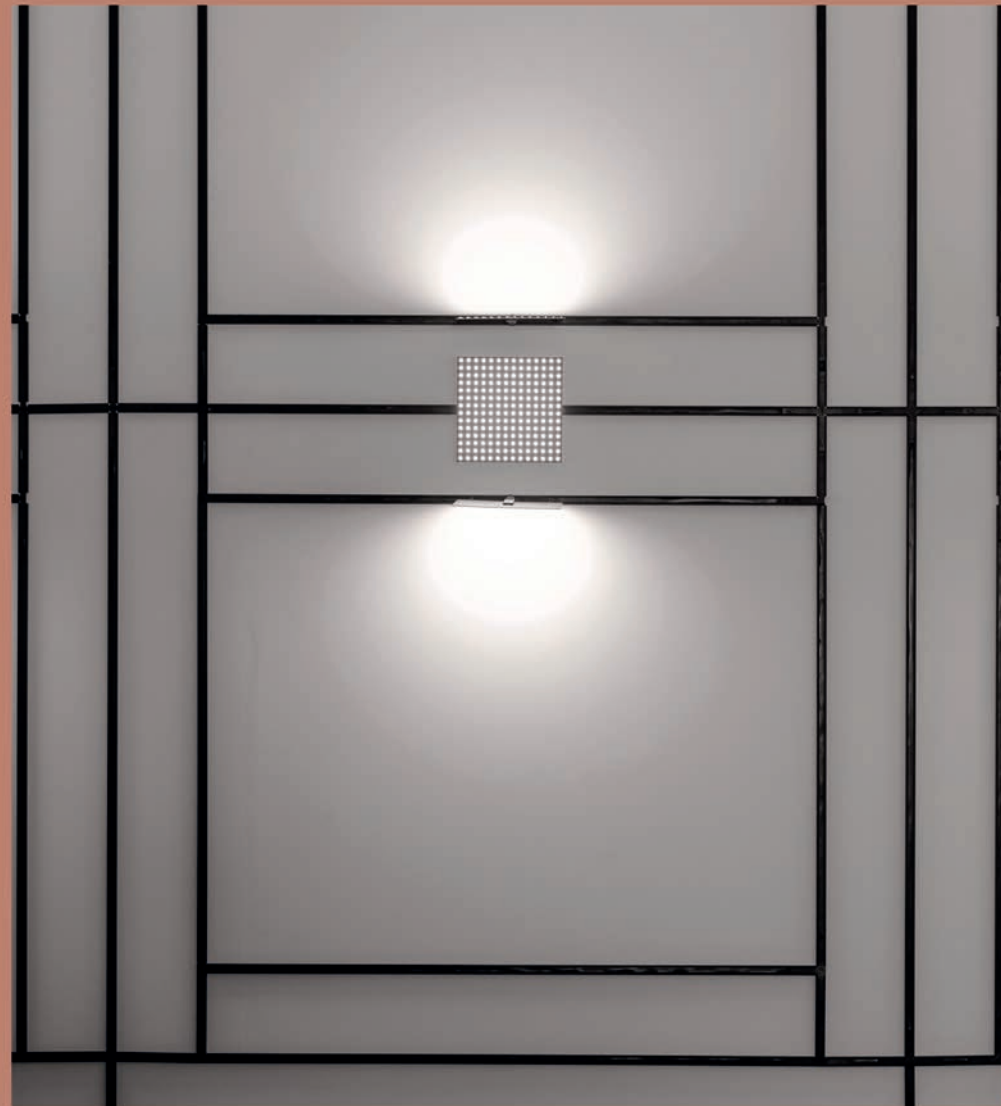

Code is a configurable lighting system composed of elementary geometries and precise light modules. Designed for clarity and consistency, it enables structured lighting concepts through simple components and defined logic.

code



TOTEM

DIMENSION

H 2100: ø 300 mm

LIGHT OUTPUT

17550 lm

POWER

163.02 W

LED / CCT

2700 K



BEACON

DIMENSION

H 2020: ø 485 mm

LIGHT OUTPUT

6750 - 6900 lm

POWER

62.7 W

LED / CCT

2700 K



SCREEN

DIMENSION

H 2020: 1100 x 650 mm

LIGHT OUTPUT

15750 - 16100 lm

POWER

146.3 W

LED / CCT

2700 K



EXPLOSION DOT

DIMENSION

H 185: ø 2605 mm

LIGHT OUTPUT

18000 - 20700 lm

POWER

192.28 - 232.76 W

LED / CCT

2700 K



LOOP

DIMENSION

H 1900 - 3850:
ø 1600 - 3800 mm

LIGHT OUTPUT

8480 - 16960 lm



POWER

80.08 - 160.16 W

LED / CCT

2700 K

system



DOT

DIMENSION

ø 200 mm

LIGHT OUTPUT

450 lm

POWER


4.18 W

LED / CCT

2700 K

LED / CCT INDIRECT

2700 K



GRID

DIMENSION

210 X 210 mm

LIGHT OUTPUT

460 lm

POWER

4.18 W

LED / CCT

2700 K

LED / CCT INDIRECT

2700 K



DASH

DIMENSION

2100 - 4200 mm

LIGHT OUTPUT

530 - 1060 lm




POWER

5.01 - 10.01 W




LED / CCT

2700 K




DRAW WITH THE MINIMAL TRACK



DEFINE YOUR POWER REQUIREMENTS



DESIGN YOUR CODE SYSTEM



code





code



code



312

314

313

3



PROLICHT

designed to create



Where light becomes
graphic expression.
Configure your own
CODE.